


## **ROLLING ROOF RIG COUNTERWEIGHT CHART**


## **16FT BEAM ASSEMBLY**

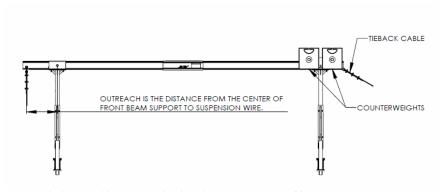

NO. OF 50LB COUNTERWEIGHTS REQUIRED PER BEAM ASSEMBLY

			OUT	RATED LOAD					
	5.0	4.5	4.0	3.5	3.0	2.5	2.0	1.5	OF HOIST (LBS)
знт	30	26	22	18	15	12	10	7	750
:WEI(	40	34	29	24	20	16	13	9	1000
COUNTERWEIGHT S (50#)	N/A	N/A	N/A	30	25	20	16	11	1250
cou	N/A	N/A	N/A	N/A	30	24	19	14	1500
N/A - OUTREACH IS NOT ALLOWED FOR RATED HOIST									


## **24FT BEAM ASSEMBLY**

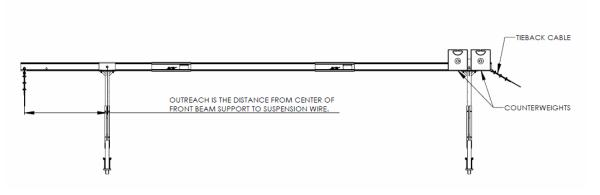

NO. OF 50LB COUNTERWEIGHTS REQUIRED PER BEAM ASSEMBLY

			OUT	RATED LOAD					
	5.0	4.5	4.0	3.5	3.0	2.5	2.0	1.5	OF HOIST (LBS)
ЗНТ	17	15	13	11	9	8	6	5	750
(50#)	22	20	17	15	12	10	8	6	1000
COUNTERWEIGH1 S (50#)	N/A	N/A	N/A	18	15	13	10	7	1250
s	N/A	N/A	N/A	N/A	18	15	12	9	1500
N/A - OUTREACH IS NOT ALLOWED FOR RATED HOIST									

## 24 FT BEAM ASSEMBLY WITH STRONGBACK

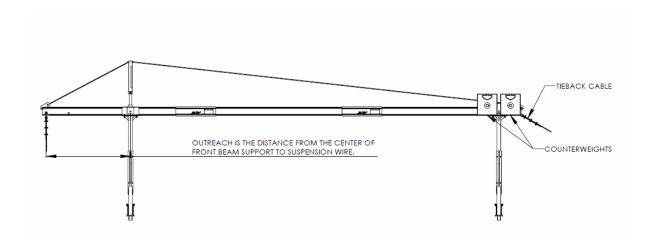

NO. OF 50LB COUNTERWEIGHTS REQUIRED PER BEAM ASSEMBLY

		OUTREACH - FEET									RATED LOAD	
		8.0*	7.5*	7.0*	6.5*	6.0	5.5	5.0	4.5	4.0	3.5	OF HOIST (LBS)
	З) 3)	34	30	28	25	22	20	18	15	13	12	750
	COUNTERWEIGHT S (50LB)	N/A	N/A	37	33	30	26	23	20	18	15	1000
		N/A	N/A	N/A	N/A	37	33	29	25	22	19	1250
l	s	N/A	N/A	N/A	N/A	N/A	N/A	35	30	26	23	1500
	N/A - OUTREACH IS NOT ALLOWED FOR RATED HOIST									IST		
	* OUTREACHES GREATER THAN 6.5FT REQUIRE (2) SPLICE PLATES AT FRONT CONNECTOR, BOLTS, AND LOCKING NUTS											