


Description

- Horizontal Lifeline Adapter for Aluminum Low Profile Walk-By Stirrup, for use with Sky Stage Ultra and Sky Stage Ultra - Boiler.

Summary

- Can be used to add HLL / Tie-off support. Must use with 4597-1000-SKY.

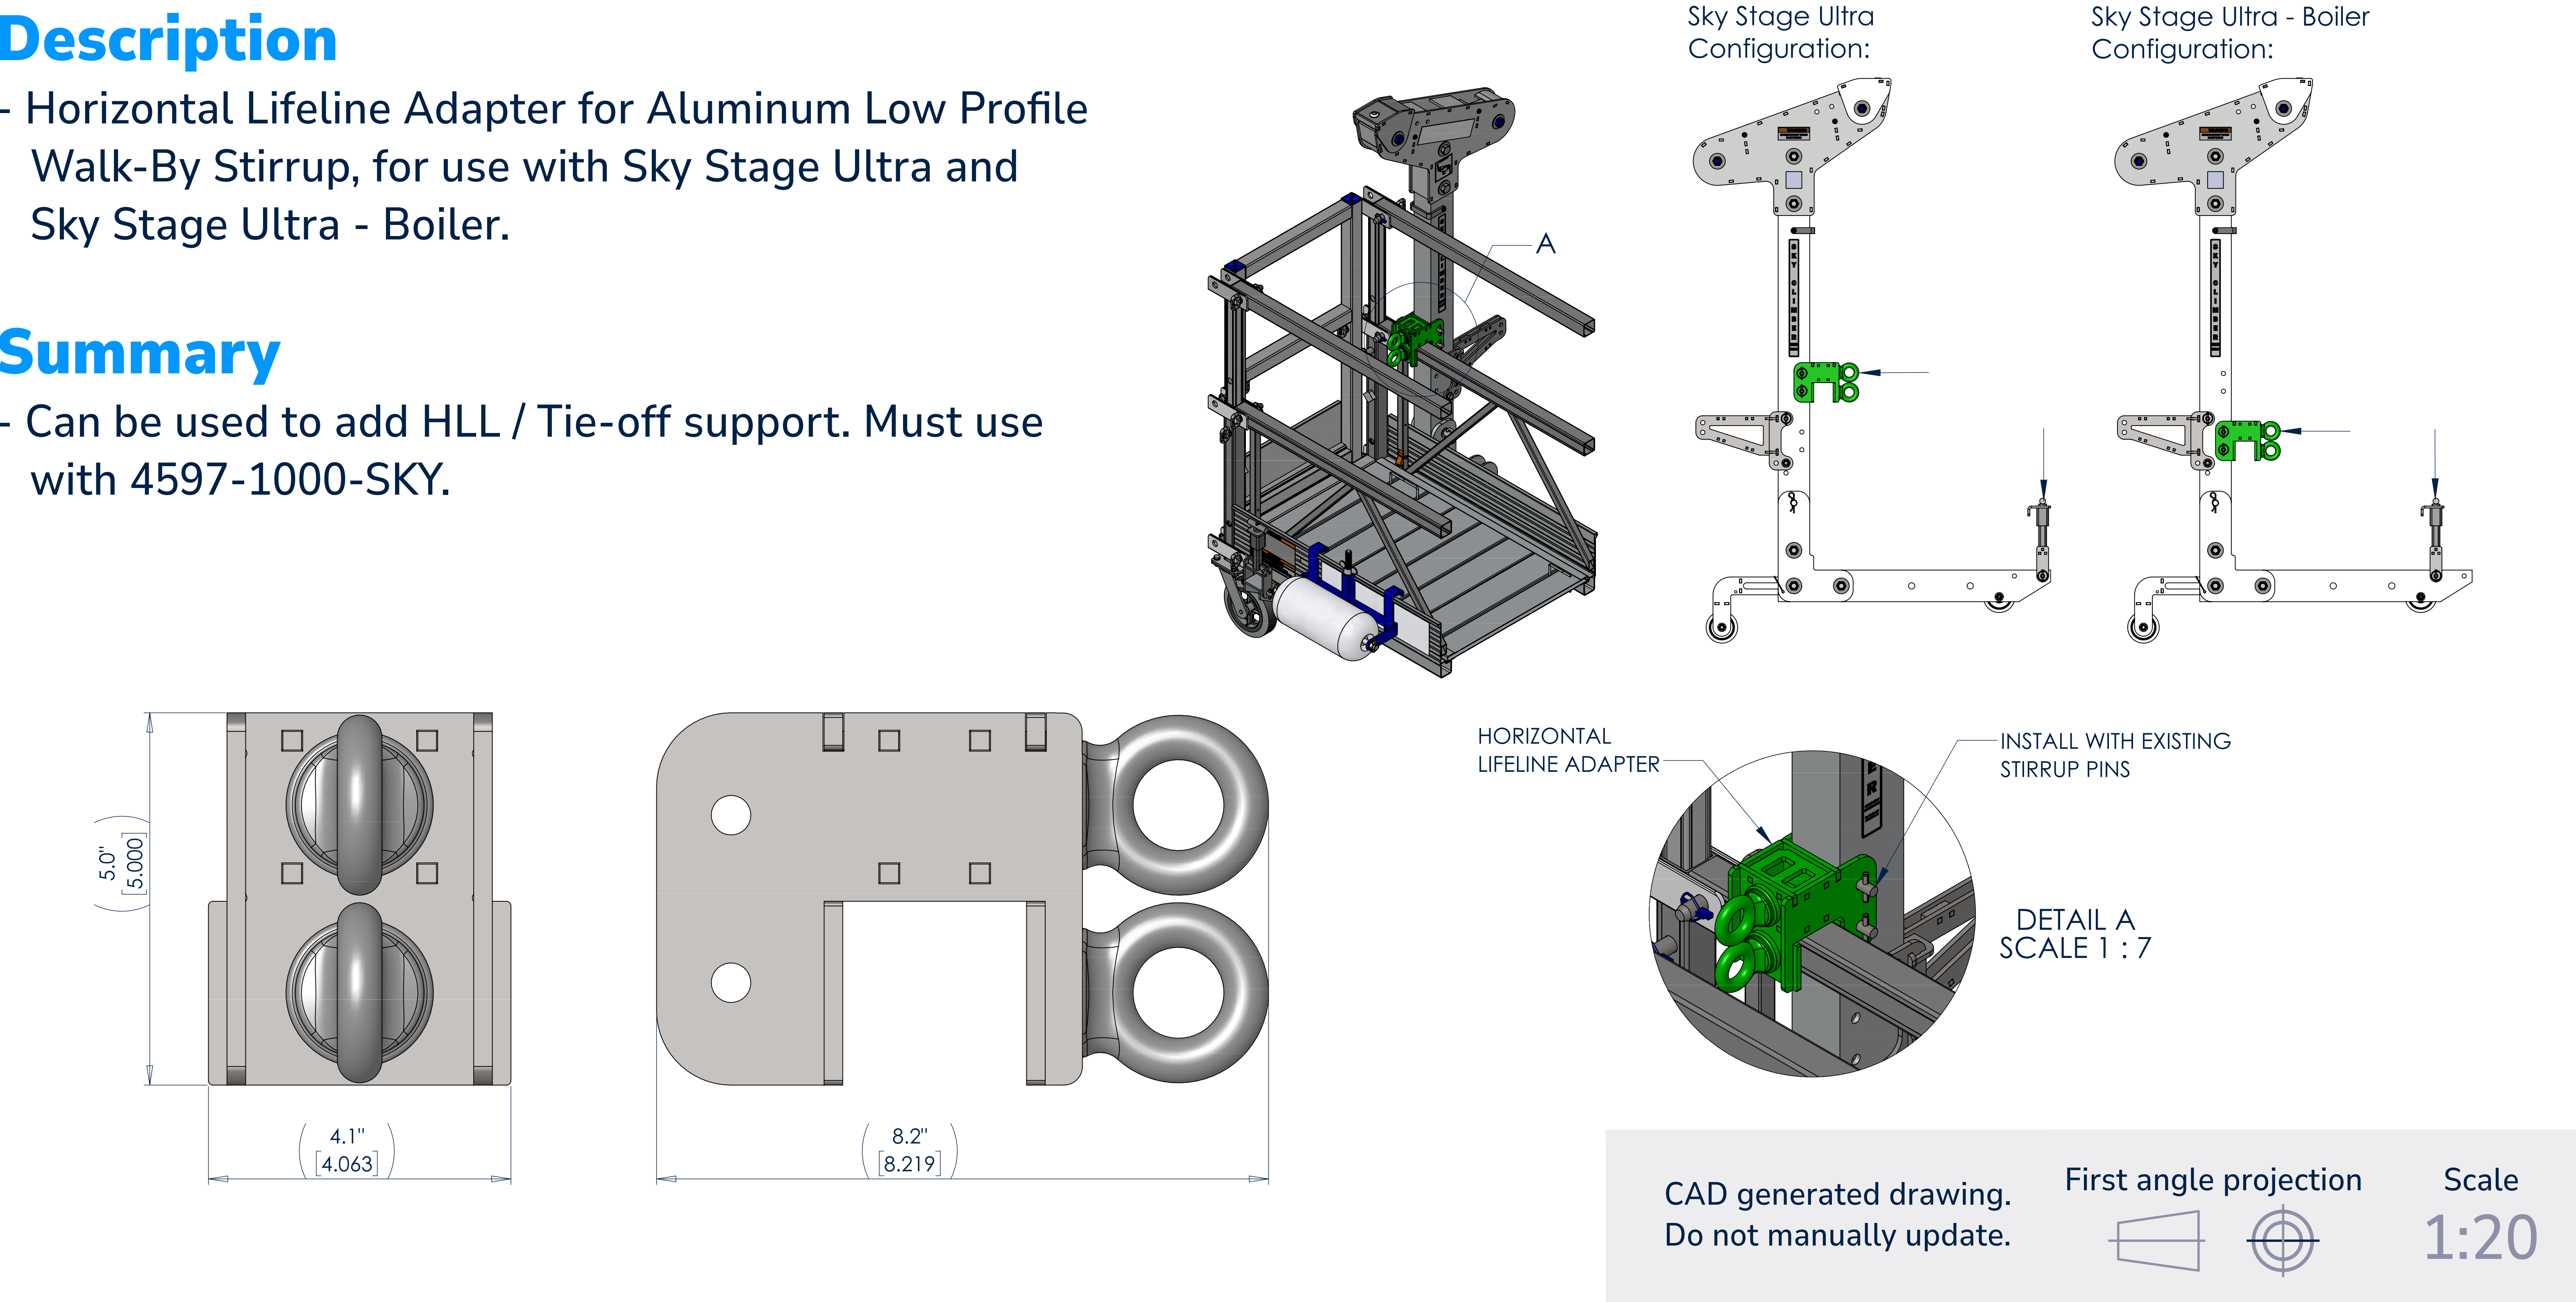

HLL USAGE CHART - CONTACT SKY CLIMBER FOR LAYOUTS			
STAGE CONFIGURATION	WORKCAGE (NO HLL)	SSU/BOILER (NO HLL)	SSU/BOILER (HLL)
Stirrup Qty	1	2	2
Max Workers	2	4	4
Upper Padeye	Direct Tie-Off	Direct Tie-Off	Direct Tie-Off
Lower Padeye	Direct Tie-Off	Direct Tie-Off	HLL

*Direct Tie-Off limited to (1) worker per padeye.

* HLL must include 3" of slack and a shock absorber. HLL must run through lower padeyes, and terminate on end connecting frames, HLL is limited to (2) workers.

* Personal fall arrest equipment must have a maximum arresting force of 900lbs.

INFORMATION	4597-1000-HLL-DATASHEET
Dimensions	4.06"x8.22"x5" (WxDxH)
Material	Steel
Weight	8.0 lbs
Finish	Galvanized

The information contained in this drawing is the sole property of Sky Climber. Any reproduction in part or whole without the written permission of Sky Climber is prohibited.

© 2026 Sky Climber, LLC. All rights reserved. Specifications subject to change without notice.